

JCKTM



■ For your ordering reference

JCK - ST1 - 13 G

Air Cap Type
ST1 / SS1 / SS2 / SS3 /
LV1 / LV2 / CN1

Tip Size
: 08 / 10
: 13 / 15 / 18

Feed Type
G: Gravity
S: Suction
P: Pressure


Model	Type of feed	Air Cap Name Part No.	Fluid Tip I.D. (mm)	Air Inlet Pressure (MPa)	Air Consumption (ℓ /min)	Fluid Output (m ℓ /min)	Fan Pattern Size (mm)	Gun Weight (g)
JCK	Gravity	SS1 (LVMP)	0.8	0.1	80	★ 50	★ 120	290
		SS3 (Conventional)	1.3	0.24	145	160	170	
			1.5			200	180	
			1.8			250	190	
		ST1 (Conventional)	1.0	0.2	240	★ 100	★ 220	
			1.3			135	240	
			1.5			165		
			1.8			200		
	Suction	SS3 (Conventional)	1.3	0.24	145	120	130	
			1.5			160	150	
			1.8			185	180	
		ST1 (Conventional)	1.3	0.2	240	95	180	
			1.5			115	190	
			1.8			140	210	
	Pressure	CN1 (Conventional)	0.8/1.0/1.3/1.5	0.24	220	100	160	
						200	210	
						300	260	
		LV1 (LVMP)	0.8/1.0/1.3	0.2	230	100	150	
						200	200	
						300	250	
		LV2 (LVMP)	0.8/1.0/1.3	0.2	230	100	200	
						200	270	
						300	320	

● Painting Conditions: Air Inlet Regulator = HARG-510 Paint Viscosity = 20sec ★ 13sec (IHS) Spray Distance = 200mm

■ Features


Ease of use and Durability

Pattern adjustment that can be adjusted more linearly

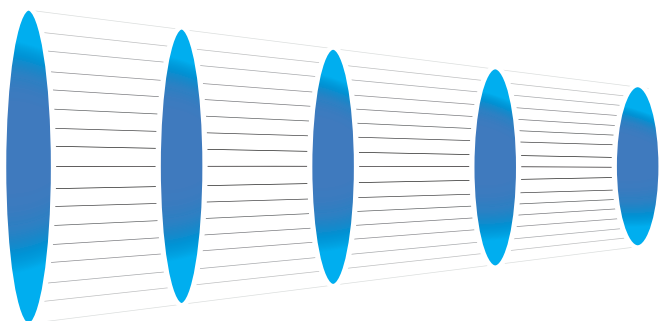


Film thickness distribution and spray pattern

Adopts a highly versatile pattern shape

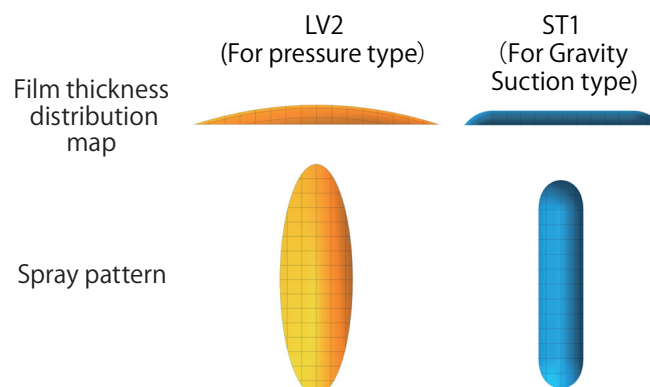

Designed with a focus on the basic performance of the spray gun

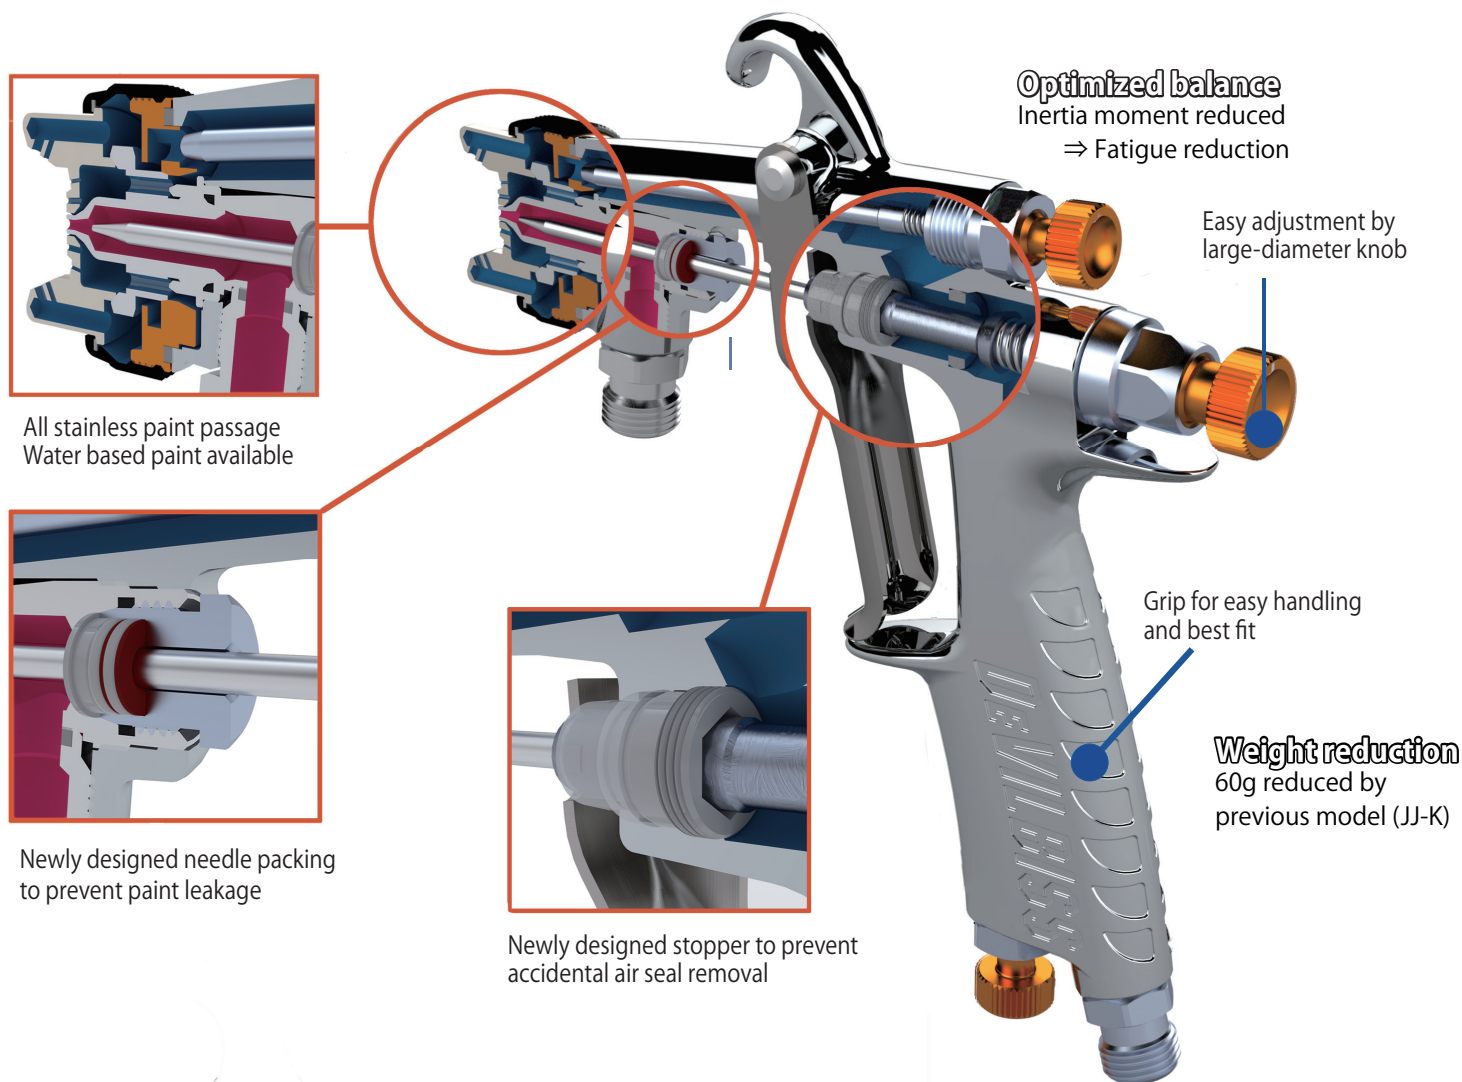

CFT Ransburg Japan KK

15-5, Fukuura 1-chome, Kanazawa-ku, Yokohama, Kanagawa Japan 236-0004

TEL : +81-45-785-6434 / FAX : +81-45-785-6517

<http://www.carlisleleft.co.jp/>

©DEVILBISS is a registered trademark of Carlisle Fluid Technologies.

For more information, please contact:

©2020 Carlisle Fluid Technologies

21.10-EN1-2k